

CAN SYSTEM

CAN SYSTEM	41-2	Diagnostic Help	41-10
Warning and Precaution	41-2	Intermittent DTC Troubleshooting	41-10
Precautions	41-2	Ground Inspection	41-11
System Overview	41-3	Diagnosis Procedure	41-12
System Schematic Diagram	41-3	Terminal Definition of Central Gateway	41-13
Special Tools and Devices	41-4	Common Troubleshooting	41-14
General Tools	41-4	Oscilloscope Analysis	41-18
System Circuit Diagram	41-5	Inspection and Adjustment	41-27
Circuit Diagram	41-5	Failure Analysis Method	41-27
Diagnosis Information and Steps	41-10	Removal & Installation	41-28
Problem Symptoms Table	41-10	Gateway Module (CGW)	41-28

دیجیتال خودرو

شرکت دیجیتال خودرو سامانه (مسئولیت محدود)

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران



دیجیتال خودرو

شرکت دیجیتال خودرو سامانه (مسئولیت محدود)

41

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران



CAN SYSTEM

Warning and Precaution

Precautions

To avoid dangerous operation and damaging vehicle before repairing, please follow the following instructions.

- Read configuration code of CGW module and record with a diagnostic tester before removing gateway module.
- Try to prevent interior and body paint surface from being scratched when removing gateway module.
- Perform power-off for 5 minutes when measuring resistance in vehicle.

دیجیتال خودرو

شرکت دیجیتال خودرو سامانه (مسئولیت محدود)


اولین سامانه دیجیتال تعمیرکاران خودرو در ایران



41

System Overview



System Schematic Diagram

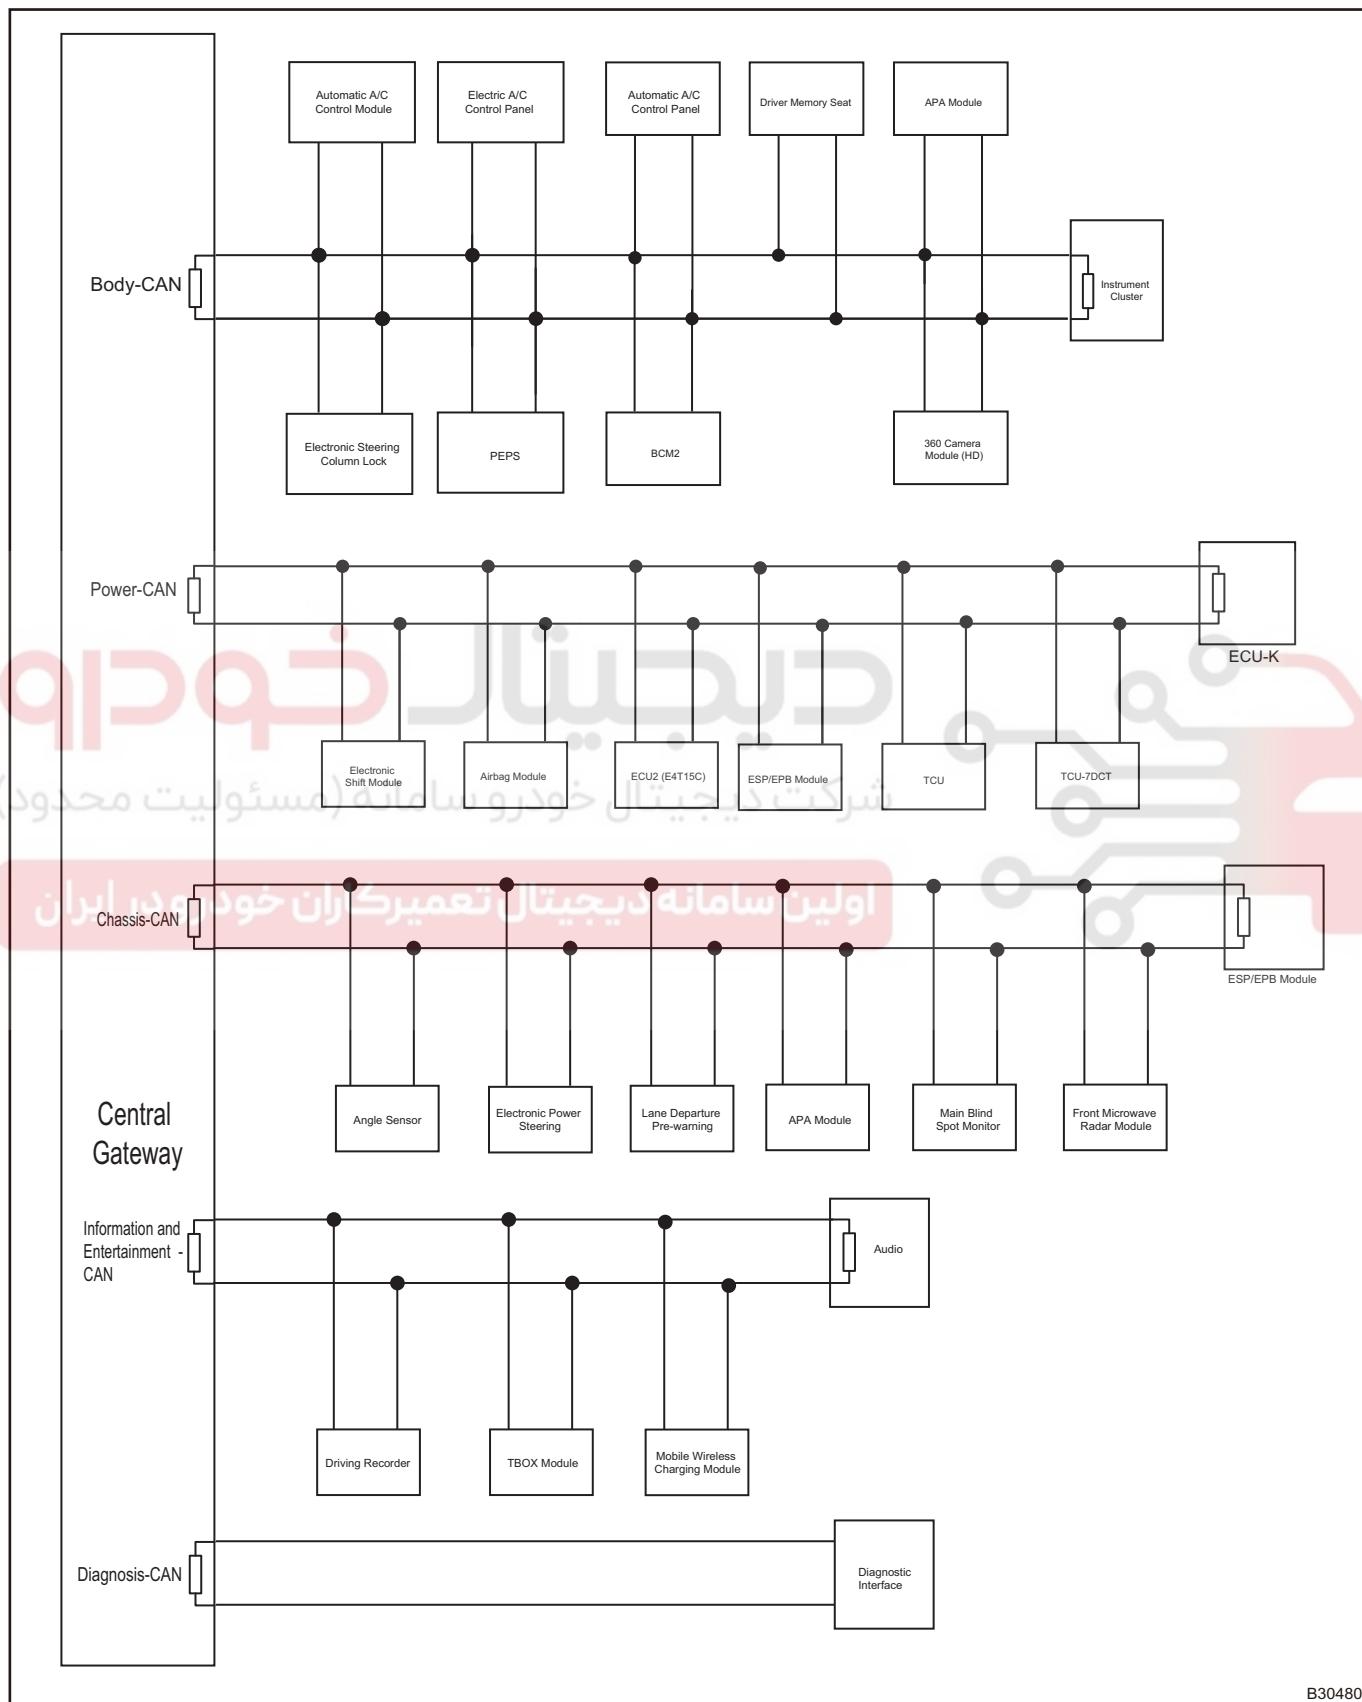

- Bus speed is: 500 Kbit/s.
- Cannot run in single line - If a CAN line of module is disconnected, CAN signal of this module cannot be transmitted.
- Drive CAN diagnosis of this vehicle is performed through diagnostic interfaces No.6 pin and No.14 pin.
- Most controllers of LX data communication system and diagnostic interfaces are connected via CAN gateway module (CGW), CAN controller and CAN transceiver are integrated into gateway module. Termination resistors are respectively integrated into gateway module, ICM, BCM, ESP, ECM, audio module (IHU) to form body CAN bus with CGW and ICM as the termination resistors, ECM and CGW are termination resistor power CAN bus, IHU and CGW are termination resistor information entertainment CAN bus, ESP and CGW are termination resistor chassis CAN bus. Termination resistance is 120Ω , termination resistance of gateway module connected with diagnostic interface is 60Ω .
- CAN bus is also called vehicle bus, and full name is "Controller Area Network" which means local area network, it connects all control units together in some way to form a complete system. Each control unit collects different signals by each sensor, and transmits data among modules under the same rules. Network information can meet different real-time requirements by its priority. Data transmitted via CAN bus control unit is level model of binary format, and data transmission line transmits the voltage signal.

Special Tools and Devices

General Tools

Tool Name	Tool Drawing
<p>Diagnostic Tester</p> <p>شرکت دیجیتال خودرو سامانه (مسئولیت محدود)</p> <p>اولین سامانه دیجیتال تعمیرکاران خودرو در ایران</p>	 <p>S00001</p>
Oscilloscope	 <p>S00042</p>
Digital Multimeter	 <p>S00002</p>

Diagnostic tester

When connecting diagnostic tester

- Connect diagnostic tester (the latest software) to diagnostic interface for communication with vehicle.
- Diagnostic interface is located at driver side instrument panel crossmember.

- Diagnostic interface uses a trapezoidal design which can hold 16 terminals.

Digital multimeter

When using digital multimeter

- Troubleshoot electrical malfunctions and wire harness system.
- Look for basic malfunction.
- Measure voltage, current and resistance.


Oscilloscope

- Troubleshoot electrical malfunctions and wire harness system.
- Look for basic malfunction.
- Measure CAN network output waveform.


System Circuit Diagram


Circuit Diagram

Central gateway

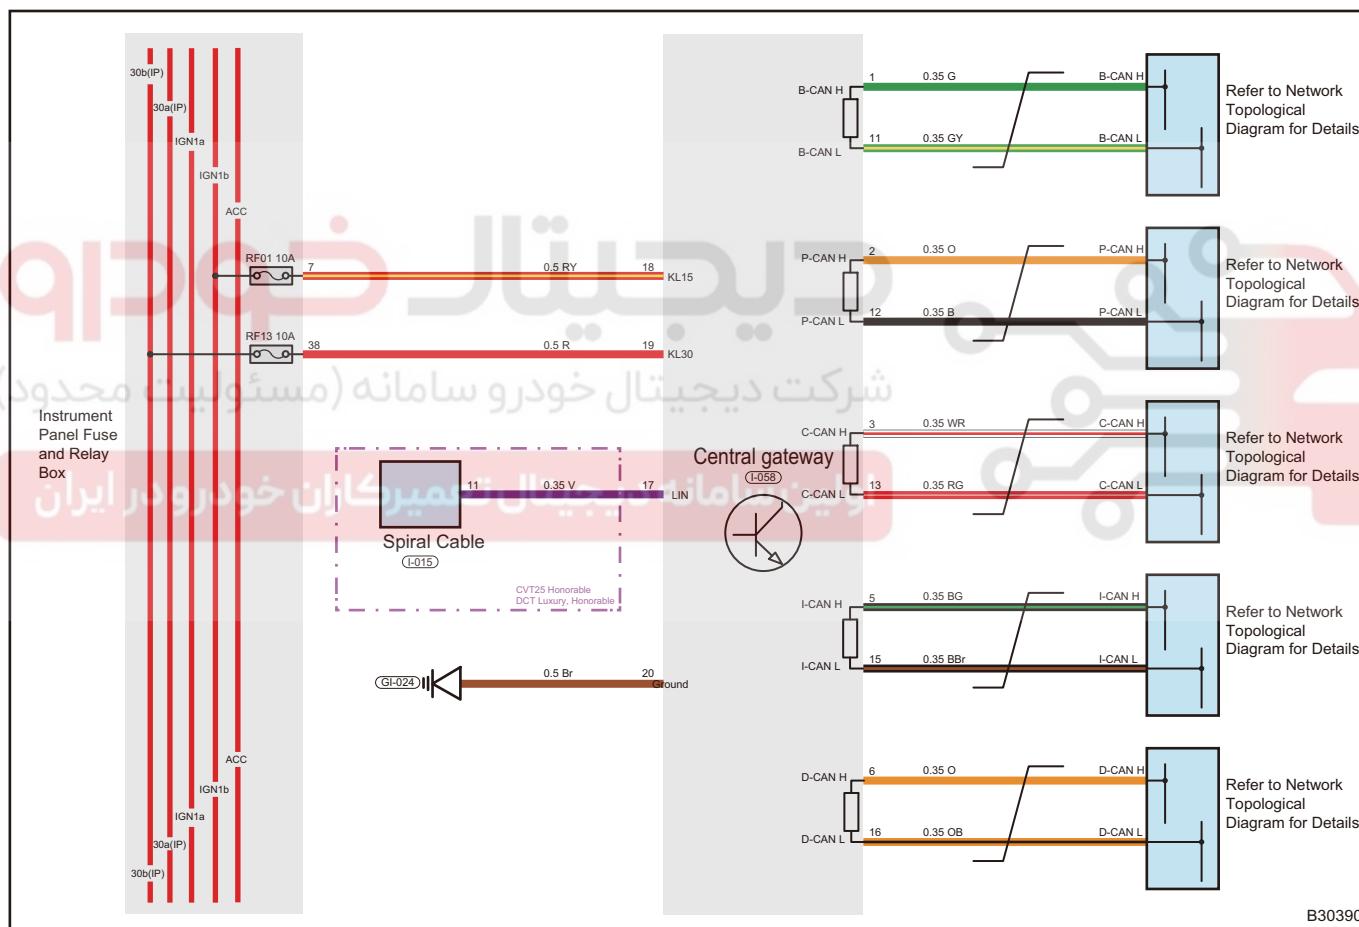


Body CAN

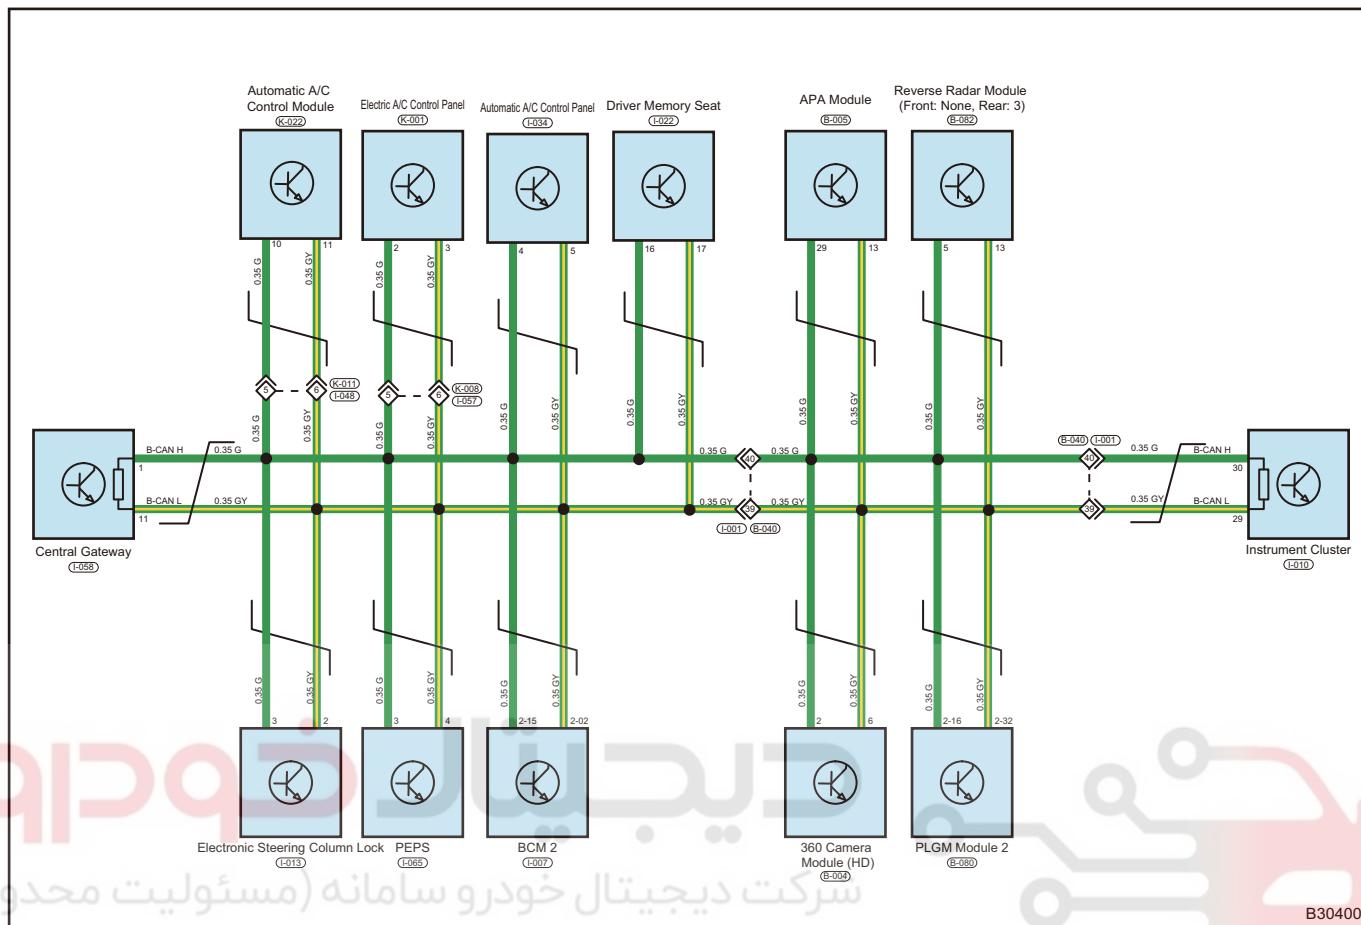

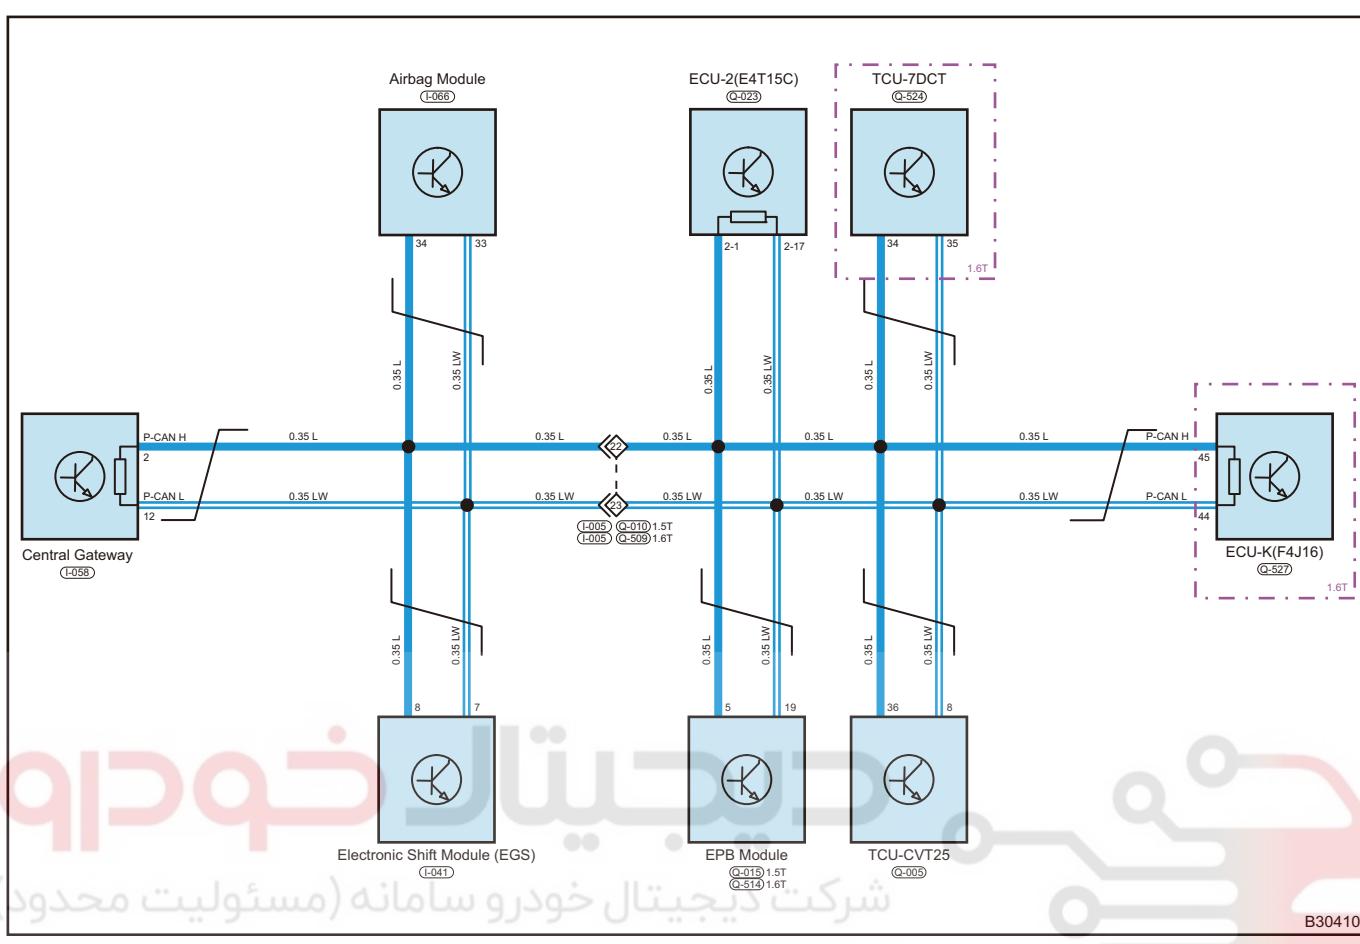



Chassis CAN

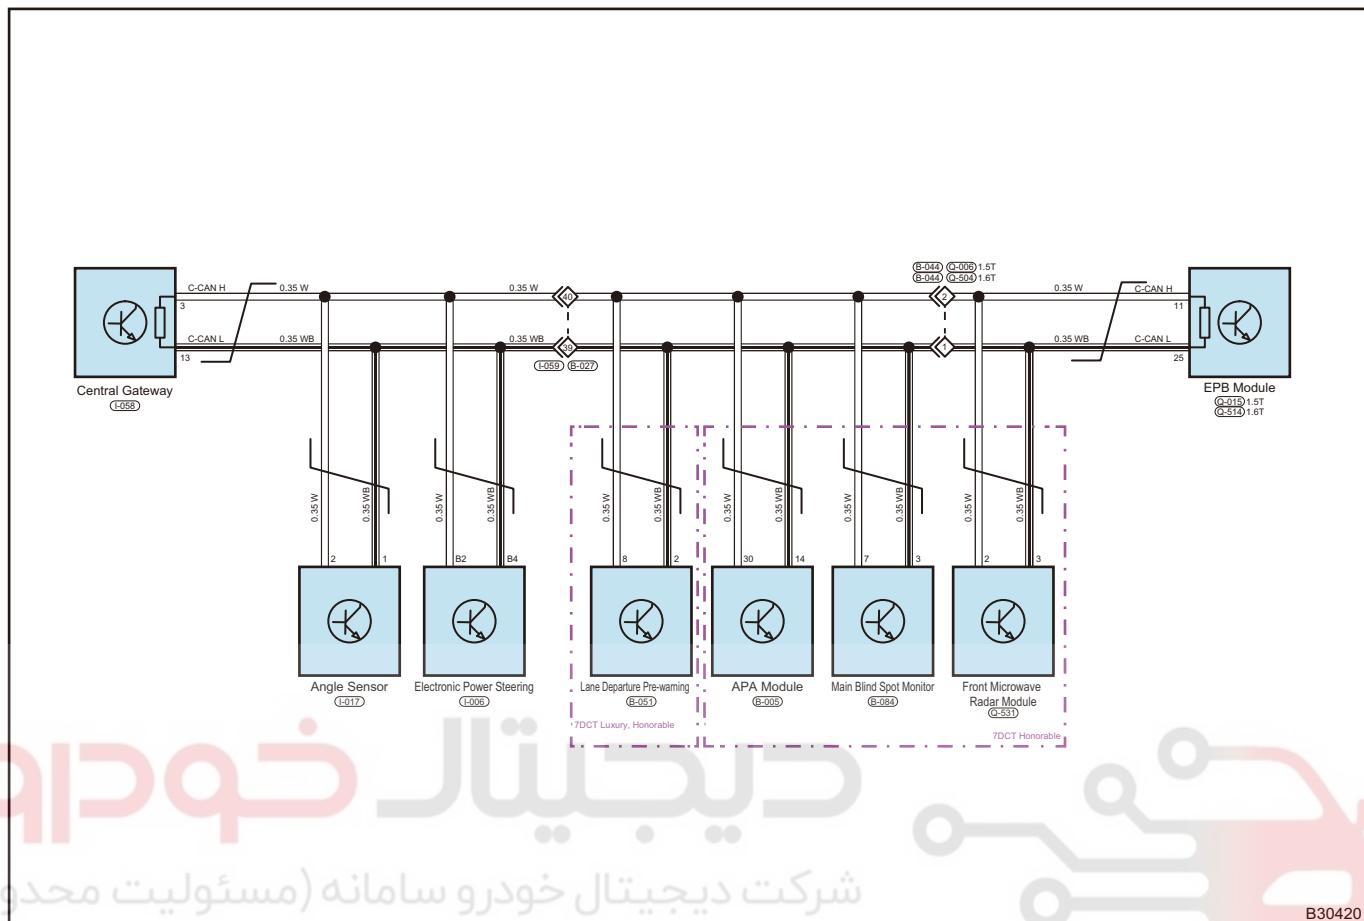

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران

41

Entertainment CAN Diagnostic Interface

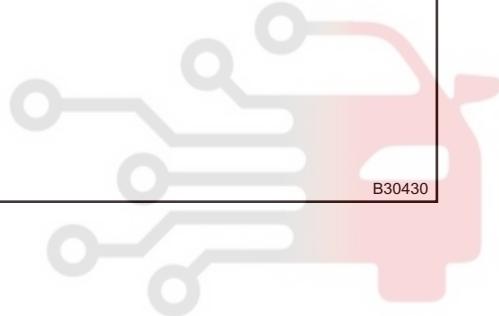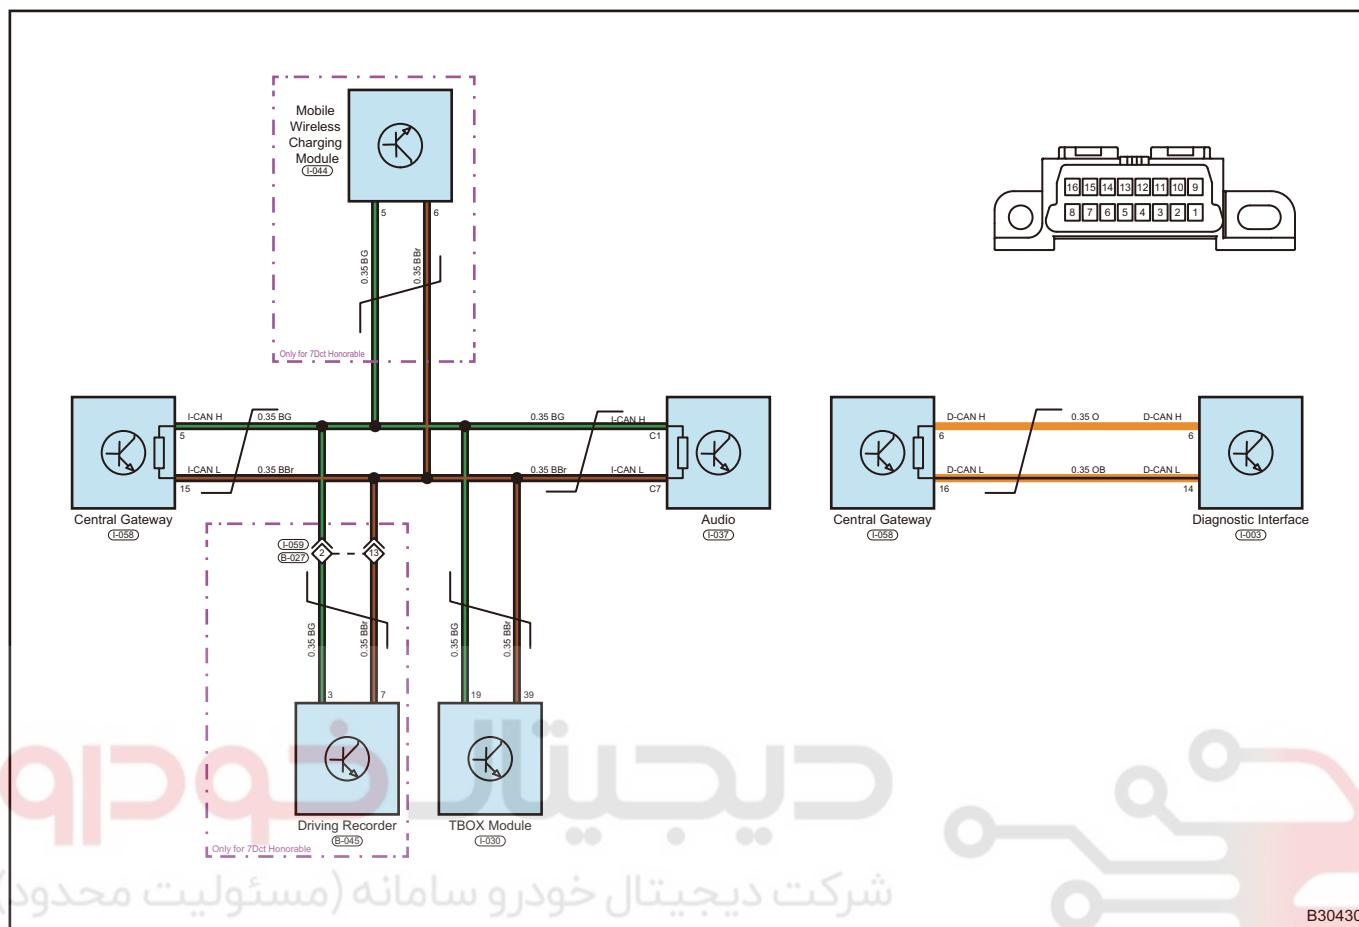

شرکت دیجیتال خودرو سامانه (مسئولیت محدود)

B30430

Diagnosis Information and Steps

Problem Symptoms Table

Use symptoms table below to help determine cause of problem. Check each suspected area in sequence. Repair, replace or adjust faulty components as necessary.

Symptom	Suspected Area
Diagnostic interface cannot access to the system	Fuse
	CAN bus
	Gateway module
Engine control system failure	CAN bus
	Battery voltage
	Module damage
	Ground wire
Brake control system failure	Wire harness or connector
	ESP module
Airbag system failure	Wire harness and connector
	Airbag module failure
Body electrical failure	Body controller failure
	Wire harness or connector
	Instrument cluster
Transmission malfunction	Transmission control module failure
	Wire harness or connector

Diagnostic Help

- Connect diagnostic tester (the latest software) to diagnostic interface, and make it communicate with vehicle electronic module through data network.
- Confirm that malfunction is current, and carry out diagnostic test and repair procedures.
- If Diagnostic Trouble Code (DTC) cannot be cleared, it indicates that there is a current malfunction.
- Only use a digital multimeter to measure voltage of electronic system.
- Refer to any Technical Bulletin that may apply to this malfunction.
- Visually check the related wire harness.
- Check and clean all system grounds related to the latest DTCs.
- If multiple trouble codes were set, use circuit diagrams and look for any common ground circuit or power supply circuit applied to DTC.

41

Intermittent DTC Troubleshooting

If malfunction is intermittent, perform the followings:

1. Check if connector is loose.
2. Check if wire harness is worn, pierced, pinched or partially broken.
3. Wiggle related wire harness and connector and observe if signal in related circuit is interrupted.
4. If possible, try to duplicate the conditions under which DTC was reset.
5. Look for data that has changed or DTC to reset during wiggling test.
6. Look for broken, bent, protruded or corroded terminals.
7. Inspect the mounting areas of instrument cluster, wire harness or wire harness connector and so on for damage, foreign matter, etc. that will cause incorrect signals.
8. Check and clean all wire harness connectors and ground parts related to DTC.
9. Remove instrument cluster from malfunctioning vehicle, then install it to a new vehicle and perform a test. If this DTC cannot be cleared, instrument cluster is malfunctioning. If DTC can be cleared, reinstall instrument cluster to original vehicle.
10. If multiple trouble codes were set, refer to circuit diagrams to look for any common ground circuit or power supply circuit applied to DTC.

11. Refer to any Technical Bulletin that may apply to this malfunction.

Ground Inspection

Groundings are very important to entire circuit system, which are normal or not can seriously affect the entire circuit system. Ground points are often exposed to moisture, dirt and other corrosive environments. Corrosion (rust) and oxidation may increase load resistance. This case will seriously affect normal operation of circuit. Check the ground points as follows:

1. Remove ground bolt or nut.
2. Check all contact surfaces for tarnish, dirt and rust, etc.
3. Clean as necessary to ensure that contacting is in good condition.
4. Reinstall ground bolt or nut securely.
5. Check if add-on accessories interfere with ground circuit.
6. If several wire harnesses are crimped into one ground terminal, check for proper crimps. Make sure that all wire harnesses are clean and securely fastened while providing a good ground path.

دیجیتال خودرو

شرکت دیجیتال خودرو سامانه (مسئولیت محدود)

41

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران



Diagnosis Procedure**Hint:**

Use following procedures to troubleshoot the CAN system.

1 **Vehicle brought to workshop**

NEXT

2 **Check battery voltage**

Check if battery voltage is normal.

Standard Condition

Standard voltage: Not less than 12 V

Result

Result	Go to
OK	A
NG	B

B

Replace battery

A

3 **Customer problem analysis**

NEXT

4 **Read DTCs**

41

Result

Result	Go to
Current DTC	A
History DTC	B

B

Troubleshoot according to intermittent DTC

A

5 **Perform repair according to DTC**

NEXT

6 **Adjust, repair or replace**


NEXT

7 **Conduct test and confirm malfunction has been repaired**

NEXT

End

Terminal Definition of Central Gateway

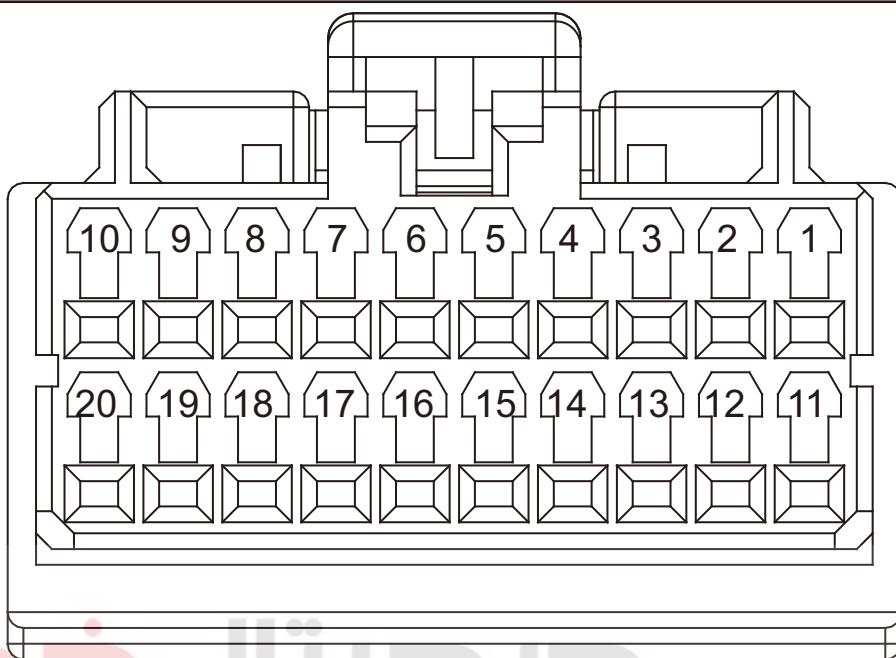

I-008

B شرکت دیجیتال خودرو سامانه (مسئولیت محدود)

B30340

41

Terminal No.	Terminal Definition	Terminal No.	Terminal Definition
1	Body CAN-H	11	Body CAN-L
2	Power CAN-H	12	Power CAN-L
3	Chassis CAN-H	13	Chassis CAN-L
4	Reserved	14	Reserved
5	Information Entertainment CAN-H	15	Information Entertainment CAN-L
6	Diagnosis CAN-H	16	Diagnosis CAN-L
7	Reserved	17	LIN
8	Reserved	18	KL15
9	Reserved	19	KL30
10	Reserved	20	GND

Common Troubleshooting

Diagnostic tester reads trouble code of CAN configuration error

- Malfunction symptom
 - Configuration is not performed by meter or BCM or configuration code fails, read "Software configuration error", "Configuration code error" with diagnostic tester.
- Exclusion methods and steps
 - This type of situation usually belongs to CAN system software failure. Write correct configuration code to these modules or sensors or calibrate these sensors, clear the trouble code and verify the malfunction phenomenon again.

Diagnostic tester cannot communicate with all modules

- Malfunction symptom
 - If diagnostic tester can be used normally on other vehicle, but cannot communicate with each module on faulty vehicle, malfunction indicators or warning lights on the meter turn on.
- Malfunction reason
 - Diagnostic interface power supply and ground malfunction, diagnostic interface CAN line is open to normal CAN line, bus CAN-H is short to CAN-L, CAN-H is short to ground, CAN-L is short to ground, CAN-H is short to power supply, CAN-L is short to power supply, CAN line is mixed, node (module) is malfunctioning or power supply grounding is abnormal.

Exclusion methods and steps

1. Diagnose interface if power supply voltage and grounding resistance are correct.
2. If diagnosis interface power supply or ground is not repaired correctly, verify the fault phenomenon again. If it is correct, go to next step.
3. Use multimeter to detect if CAN diagnostic resistance is correct.
4. If it is not correct, repair link between diagnostic interface and two modules with termination resistor or replace module with incorrect resistance to verify the malfunction symptom again. If it is correct, go to next step.
5. Connect oscilloscope and observe waveform at the same time. Observe if waveform is normal.
6. If it is not normal, check and repair the supply and ground of these modules, verify the malfunction symptom again. If it is normal, go to next step.
7. Determine type of fault waveform, inspect and repair, then reconfirm the fault phenomenon again.

Diagnostic tester cannot communicate with several modules

- Malfunction symptom
 - The diagnostic tester cannot communicate with several modules, but can communicate with at least one module.
- Malfunction reason
 - Module power supply malfunction, CAN main line open, CAN line mixed fitting, node (module) malfunction, gateway module malfunction.


Power supply malfunction (power supply and ground)

The core part of vehicle multiplex system is an electronic control unit containing a communication IC chip. The normal operating voltage of the electronic control unit is generally in the range of operating voltage: $9 \text{ V} \leq U \leq 16 \text{ V}$. CAN network communication voltage range: $6 \text{ V} \leq U \leq 16 \text{ V}$. If the operating voltage provided by vehicle power system is lower than this value, some electronic control units with higher requirements on operating voltage will temporarily stop working, thus making multiplex system unable to communicate. The CAN hardware controller inside ECM may not work under 6 V. Use battery tester to detect, if it does not meet the requirements, charge the battery or replace the battery (and also detect the power generated by alternator).

Link malfunction

Link refers to a communication connection line between nodes. Link malfunction refers to malfunction of data communication lines, such as short circuit, open circuit and communication signal attenuation or distortion caused by changes in physical properties of the lines. These factors often cause multiple electronic control units to fail to work properly or the control system to operate improperly. To determine whether the link is malfunctioning, use an oscilloscope or a specific vehicle CAN tester to observe whether the current data communication signal matches the standard data communication signal.


Maintenance methods are generally to repair shorted or open twisted-pair lines, or to eliminate the root cause of changing the physical properties of twisted-pair lines.

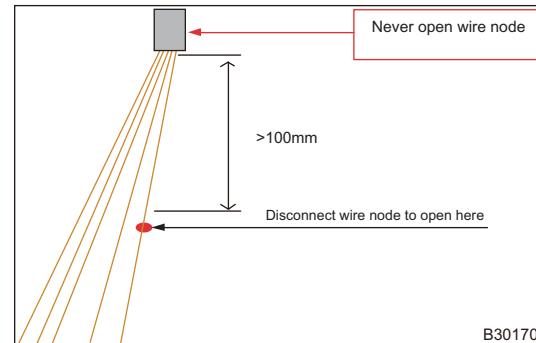

B30170

1. Maintenance instructions for CAN line

Sometimes in order to determine the malfunction, it is necessary to disconnect a control unit from the line connection point and disconnect the CAN bus connected to the control unit, or to repair wire harness after the malfunction has been determined. The data transmitted by CAN bus may even affect vehicle safety and life safety of personnel. Improper maintenance of CAN bus may cause interference or loss of signals, resulting in these data not being transmitted. Therefore, the following regulations must be observed during maintenance:

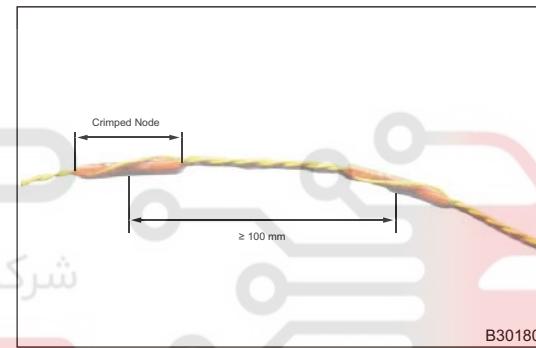


B30180


- During CAN bus maintenance, the disconnection point is required to be at least 100 mm away from the line node, and the line node must never be opened, maintained and updated.
- If the CAN line is to be disconnected, it is only allowed to be carried out at a distance of ≥ 100 mm from the next pressure node; The twisting of CAN lines is of decisive significance to the interference effect of CAN. Only if the twisting is not damaged, the CAN can be protected from interference, so keep as little interference with the twisting as possible during maintenance.

2. Use a multimeter to measure the resistance to ground and power supply of CAN-H and CAN-L

- (a) After disconnecting battery for 5 minutes, the measured resistance values to ground of diagnostic interface 6# (CAN-H) and 14# (CAN-L) are ∞ .

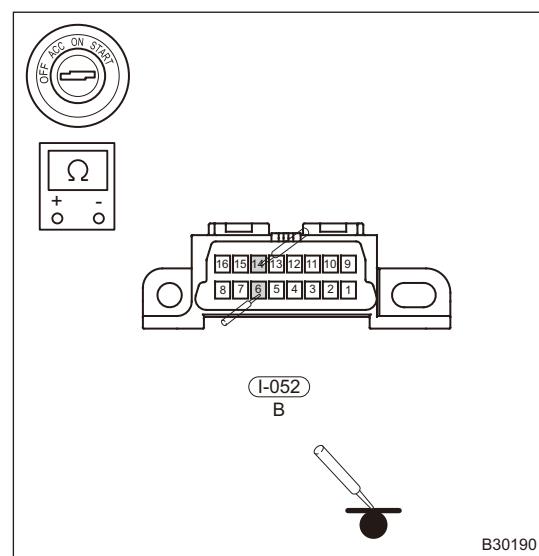

- (b) After disconnecting battery for 5 minutes, the measured resistance values to 16# of the diagnostic interface 6# (CAN-H) and 14# (CAN-L) are ∞ .

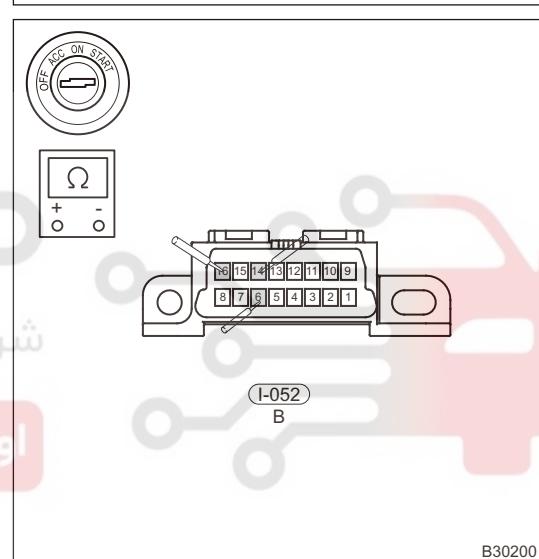


3. Termination resistor

The termination resistor is installed in gateway module of system and is used to prevent CAN bus signal from reflecting the changing voltage on CAN bus. When the termination resistor fails and the square wave is transmitting, because of the reflection of line, if it is serious, the signal will be deformed and the signal of control unit will be invalid. When measuring the CAN bus signal with an oscilloscope, if the signal does not match standard signal, it is also necessary to check whether the termination resistor is damaged.

(a) Measuring step of termination resistor:

- Turn ENGINE START STOP switch to OFF, disconnect the negative battery cable;
- Wait about 5 minutes until all capacitors are fully discharged;
- Connect the measuring instrument and measure total resistance.

Using ohmmeter, measure resistance between diagnostic interfaces I-052 (6) and I-052 (14) (standard resistance is 60Ω).

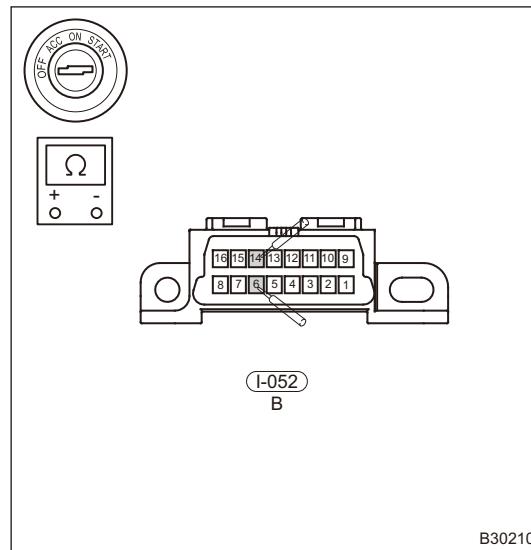


Measured value (for reference only): the measured resistance between diagnostic interfaces 6 # and 14 # is 58.7Ω (the two termination resistors are connected in parallel), after gateway module is disconnected separately, and the measured resistance between diagnostic interfaces 6 # and 14 # is ∞ .

دیجیتال خودرو

شرکت دیجیتال خودرو سامانه (مسئولیت محدود)

41

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران

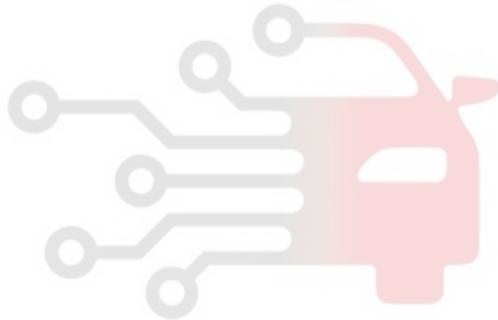


Oscilloscope Analysis

1. Oscilloscope connection

CH1 (channel 1) is connected to diagnostic interface 6# (CAN-H), CH2 (channel 2) is connected to diagnostic interface 14# (CAN-L), and alligator clip of the oscilloscope probe is connected to the common body ground.

(a) Normal waveform

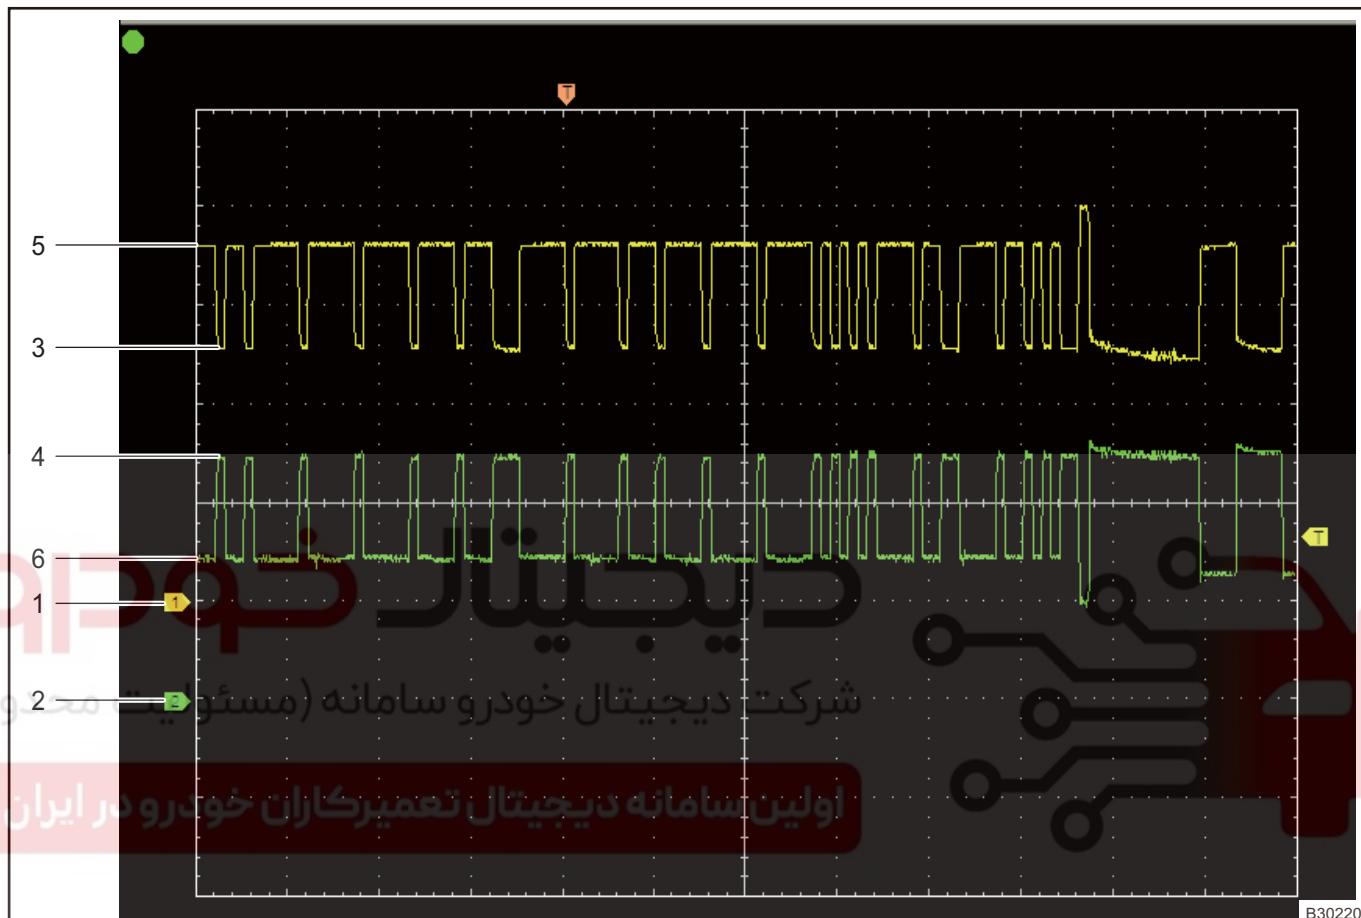

B30220

Description:

- Zero potential of CAN-H.
- Zero potential of CAN-L.
- The recessive voltage potential of CAN-H is approximately 2.6 V (logic value 1).
- The recessive voltage potential of CAN-L is approximately 2.5 V (logic value 1).
- The dominant voltage potential of CAN-H is approximately 3.6 V (logic value 0).
- The dominant voltage potential of CAN-L is approximately 1.4 V (logic value 0).

Potential	CAN-H - Ground	CAN-L - Ground	Voltage Difference
Dominant	3.6 V (3.5 V)	1.4 V (1.5 V)	2.2 V (2.0 V)
Recessive	2.6 V (2.5 V)	2.5 V (2.5 V)	0.1 V (0 V)

Note:

- Always use voltage difference between two lines to confirm data. When voltage of CAN-H rises, the voltage of CAN-L decreases accordingly. The waveform is rectangular and symmetrical.
- As the oscilloscope shows, CAN-Bus has only two operating states. At the recessive voltage potential, the two voltage values are very close. At the dominant voltage potential, the two voltage standard difference is 2.0 V.

- The difference between measured voltage value and standard value is approximately 100 mV.
- During communication, high-speed CAN operating voltage range: CAN-H: 2.75 V~4.5 V (dominant), 2 V~3 V (recessive); CAN_L: 0.5 V~2.25 V (dominant), 2 V~3 V (recessive); No signal transmission means that CAN bus will transmit recessive signals when it is idle, and new information will start with dominant signals.

2. Short circuit malfunction waveform of CAN-H and CAN-L




Malfunction symptoms:

- Observe with an oscilloscope, the voltage potential is at recessive voltage value (approximately 2.5 V). By moving the position of zero potential on two oscilloscope channels to make the zero potential of two channels be coincident. It can be seen that waveforms of the CAN-H and CAN-L change consistently and their potentials are consistent.

LX actual vehicle test

- The short circuit waveforms of CAN-H and CAN-L during LX actual vehicle test are shown in following illustration. Both waveforms are straight line with a voltage of approximately 2.5 V. Use a multimeter to test that the termination resistor is close to or equal to 0 ohms. Power CAN and body CAN, CAN-H and CAN-L short circuit vehicles can not start.

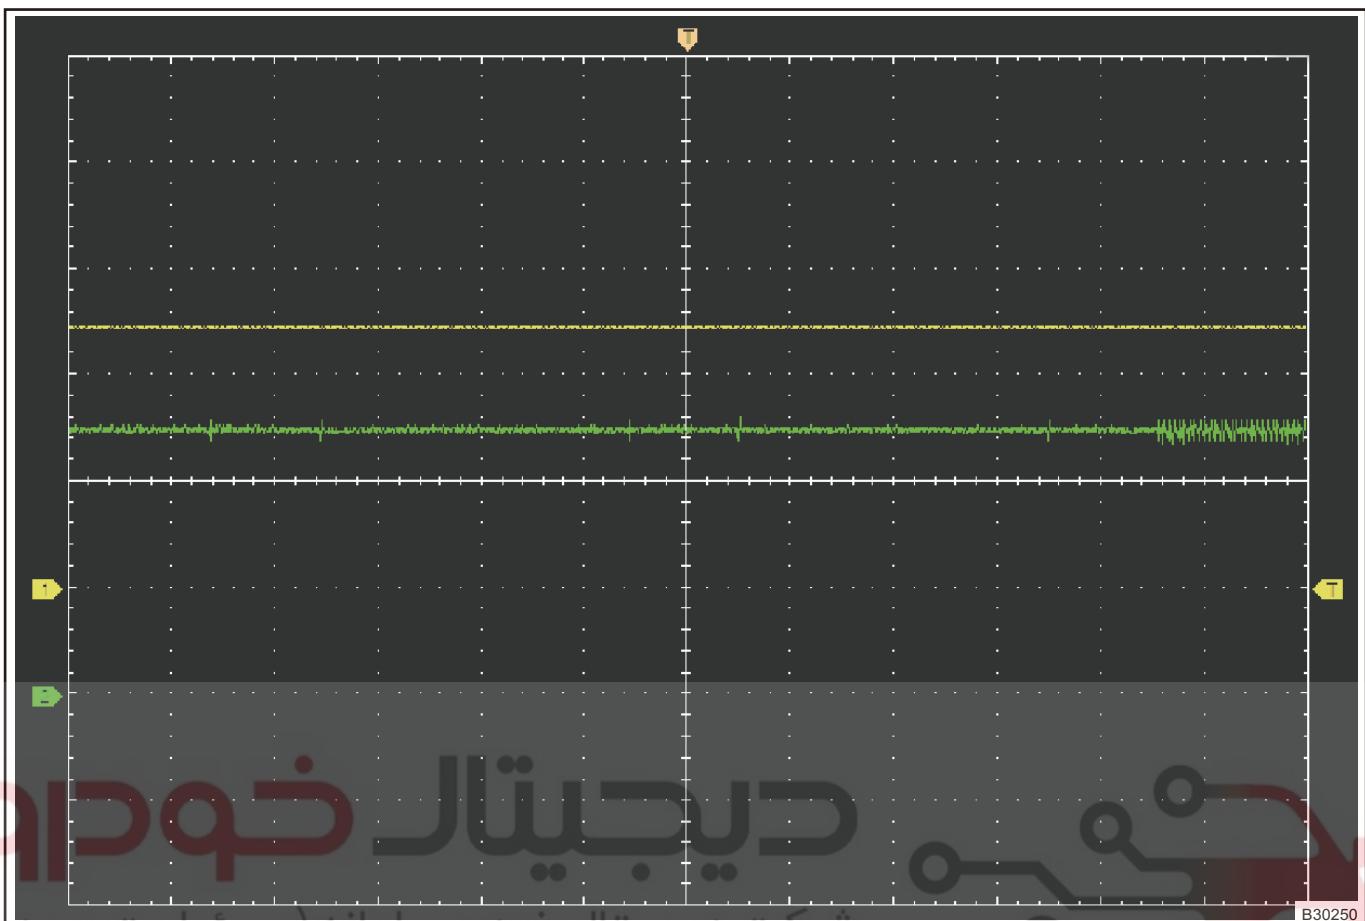

Troubleshooting procedures:


- By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged whether it is a short circuit caused by the control unit or by the CAN-H and CAN-L line connection.
- If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning.
- For short circuit caused by short circuit of line, it is necessary to disconnect CAN wire groups (CAN-H and CAN-L) from wire harness connector or wire harness node in turn, and pay attention to waveform of oscilloscope. After disconnecting faulty wire group, waveform of oscilloscope returns to normal.
- When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.

3. CAN-H is short to power supply
- Malfunction waveform



41

- Malfunction symptoms:
 - Observe with an oscilloscope: the voltage potential of CAN-H line is placed at 12 V, the recessive voltage of CAN-L line is placed at approximately 12 V, and amplitude becomes larger due to internal connection of CAN-H and CAN-L in transceiver of control unit.
- Troubleshooting procedures:
 - By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged whether it is a short circuit caused by the control unit or by the CAN-H line connection;
 - If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
 - When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.
- LX actual vehicle test
 - The short circuit waveform to positive in CAN-H during LX actual vehicle test is shown in following illustration. The voltage potential of CAN-H line is placed at 12 V (battery voltage), and the recessive voltage of CAN-L line is placed at approximately 12 V (battery voltage). The amplitude becomes larger. The diagnostic tester cannot access each module. Power CAN and body CAN, CAN-H short to power supply, vehicles can not start.

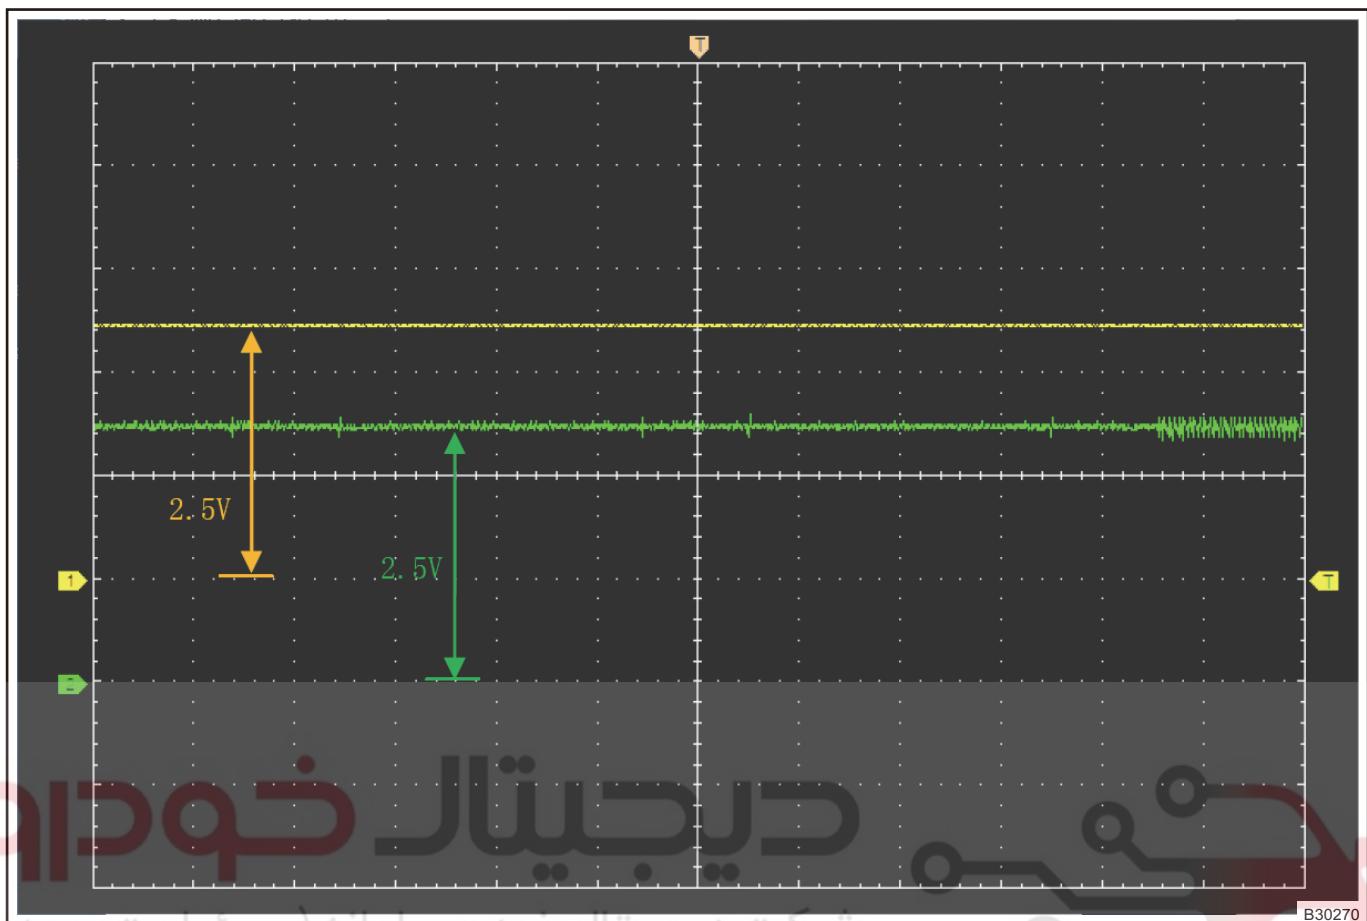


شرکت دیجیتال خودرو سامانه (ستولیت مددود)

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران

41


4. CAN-H is short to ground
(a) Malfunction waveform

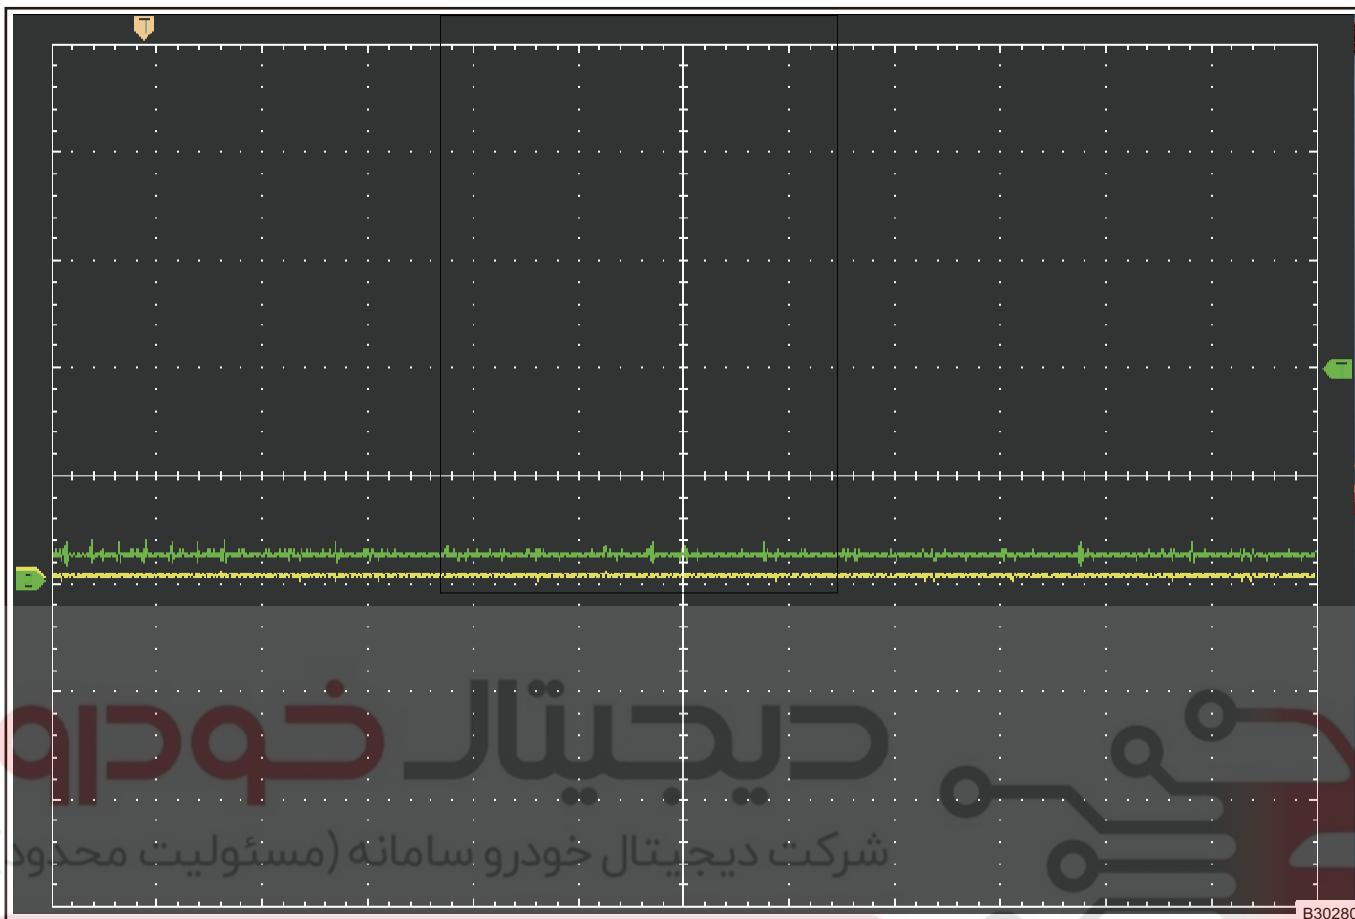

41

- (b) Malfunction symptoms
(1) Observe with an oscilloscope: The voltage potential of CAN-H line is placed at 0 V, and the voltage of CAN-L line is placed at about 0.2 V (near 0 V).
(c) Malfunction Reason
(1) Bus CAN-H is short to ground, node (module) malfunction.
(d) Troubleshooting procedures
(1) Plug and unplug control unit on CAN bus one by one, and observe if the oscilloscope waveform becomes normal;
(2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
(3) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.
(e) LX actual vehicle test
(1) In the short circuit waveform to ground in CAN-H during actual vehicle test, the voltage potential of CAN-H line is placed at 0 V, and the recessive voltage of CAN-L line is placed at approximately 0.2 V. Power CAN and body CAN, CAN-H short to ground, vehicles can not start.

5. Short to ground in CAN-L
(a) Malfunction waveform

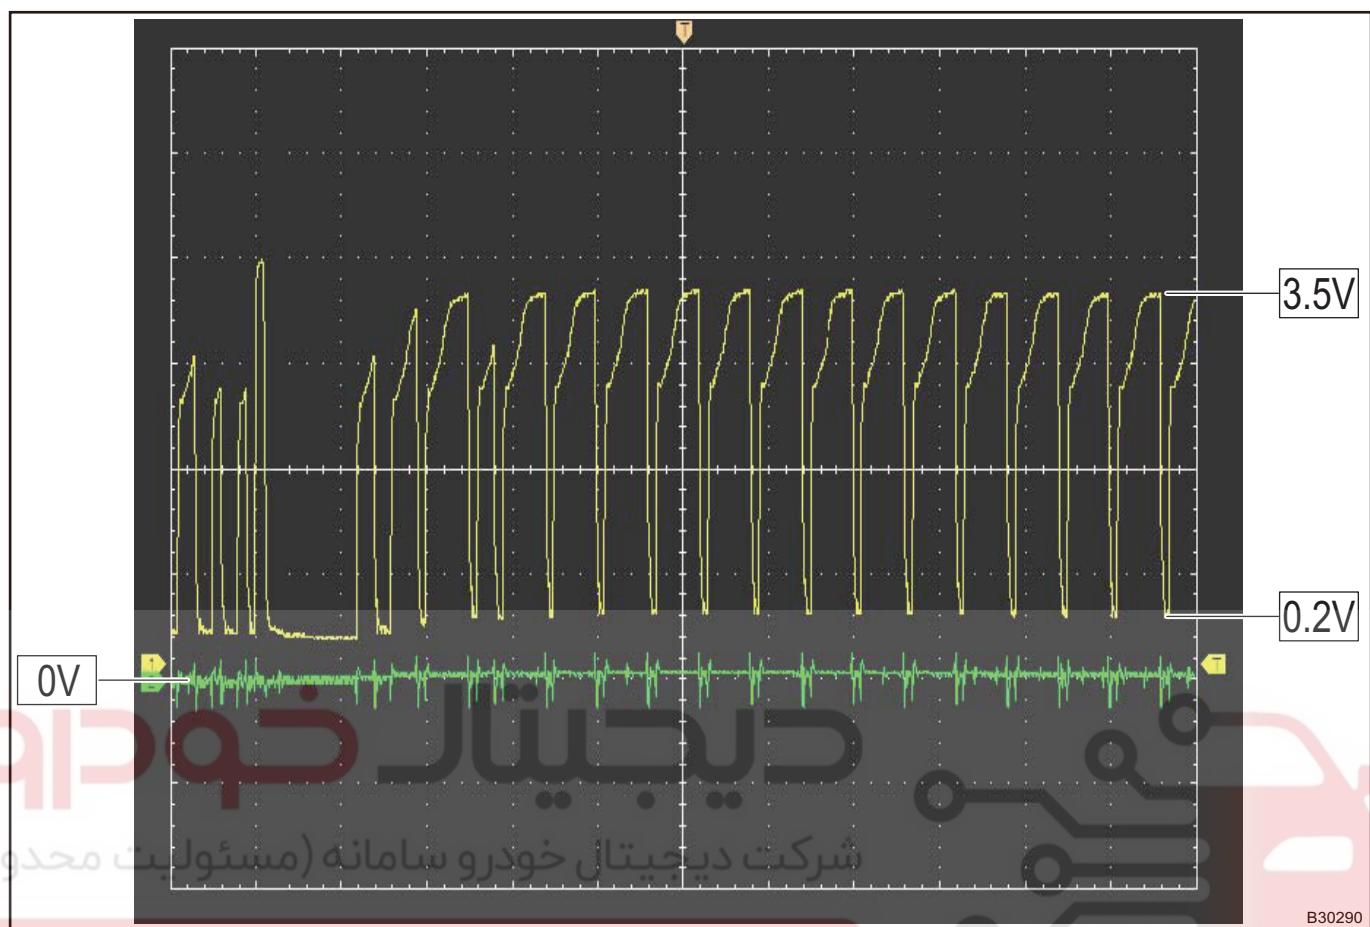


B30290

41

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران

(b) CAN malfunction waveform

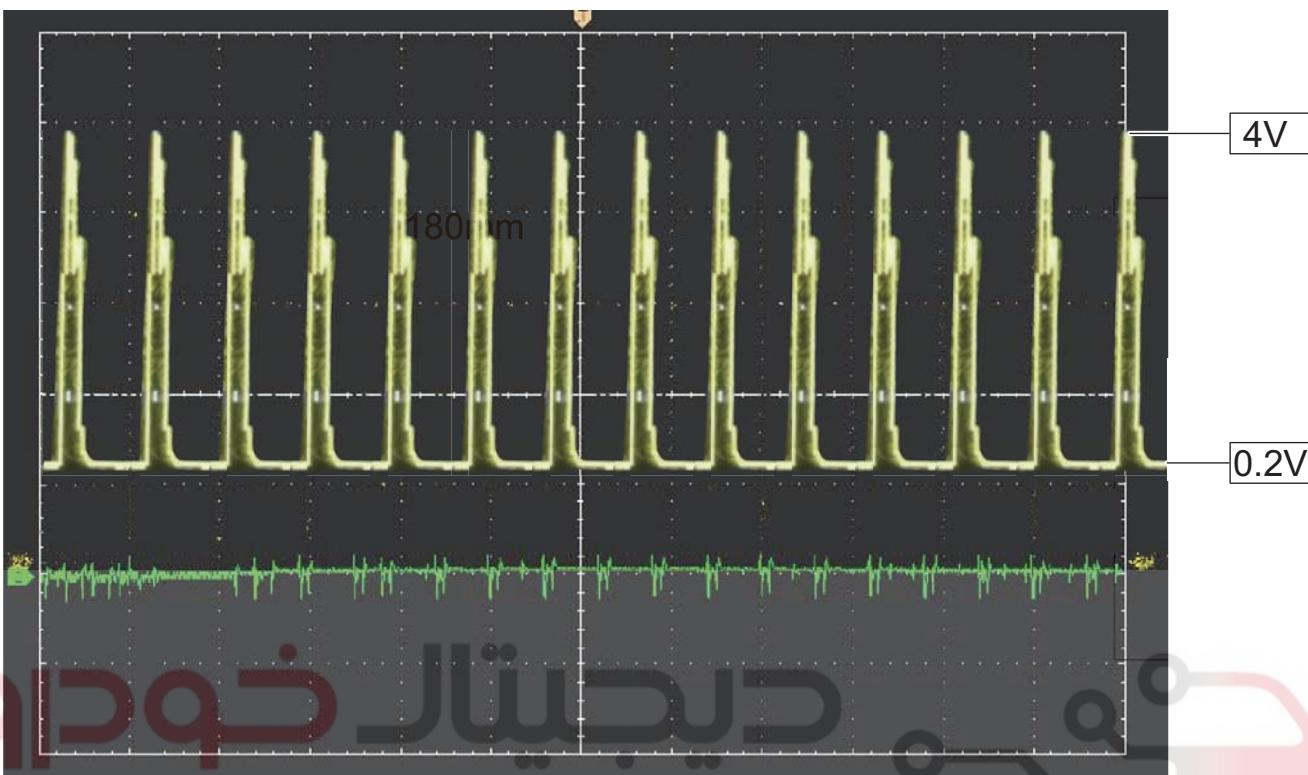

شرکت دیجیتال خودرو سامانه (مسئولیت محدود

B30300

41

(c) Malfunction symptoms:

- (1) Observe with an oscilloscope: The voltage of CAN-L is approximately 0 V, and the recessive voltage of CAN-H line is also reduced to 0.2 V (near 0 V).

(d) Malfunction Reason

- (1) Bus CAN-L is short to ground, node (module) malfunction.


(e) Troubleshooting procedures

- (1) By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged whether it is a short circuit caused by the control unit or by the CAN-L line ground;
- (2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
- (3) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.

(f) LX actual vehicle test

- (1) In the short circuit waveform to ground of CAN-L during LX actual vehicle test, the voltage potential of CAN-L line is placed at 0 V. Power CAN and body CAN, CAN-L short to ground, vehicles can not start.

6. CAN-L short to power supply
 (a) Malfunction waveform

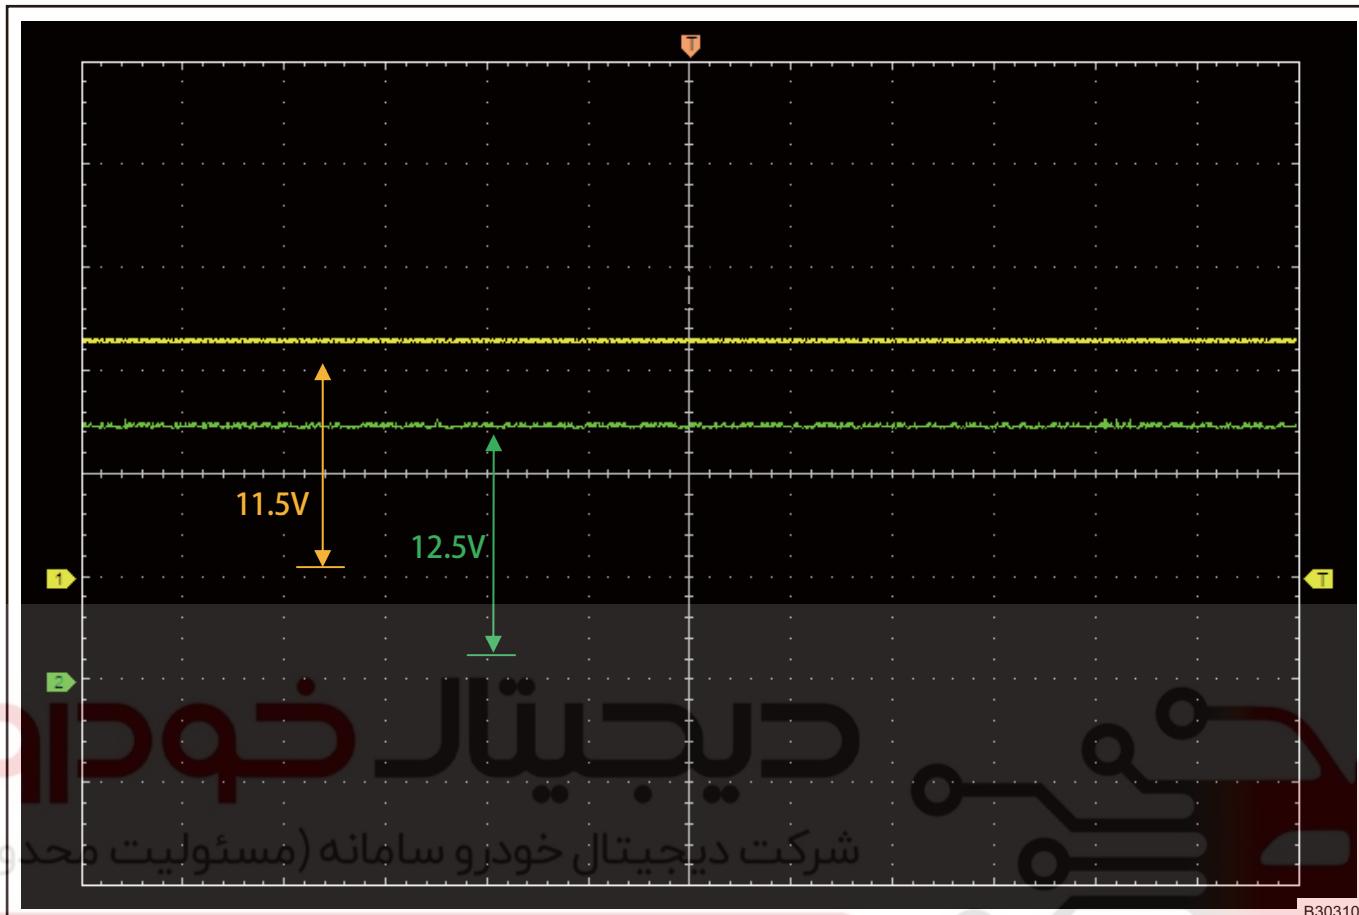

41

- (b) Malfunction symptoms:
 (1) Observe with an oscilloscope: Both bus voltages are approximately 12 V, and waveforms are straight lines.
- (c) Malfunction reason:
 (1) Bus CAN-L is short to power supply, node (module) malfunction.
- (d) Troubleshooting procedures
 (1) By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged whether it is a short circuit caused by the control unit or by the CAN-L line short to power supply;
 (2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
 (3) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.
- (e) Actual vehicle test
 (1) LX actual vehicle test, after CAN-L is shorted to power supply, power CAN and body CAN, CAN- L short to power supply, vehicles can not start.

Inspection and Adjustment

Failure Analysis Method

Use diagnostic tester to diagnose and analyze the trouble code

When a module or several modules need to receive the data sent by a module to complete the corresponding function, once the data is not received, the module received the data will generate trouble codes, which could be read by diagnostic tester as: "Lost communication with XX module", "Communication with XX module is not normal"; When the bus is out of work, the trouble code will be read as CAN bus close; When there is malfunction on module CAN configuration, code will be reported as "configuration code error".

1. CAN network failures consist of the following types:

- (a) Receive continuous invalid signals: This type of fault indicates communication effective bit received by control module is "invalid" or invalid signal after processing.
- (b) Signal is below normal range: This type of fault indicates serial data bus signal is below normal range.
- (c) Signal is above normal range: This type of fault indicates serial data bus signal is above normal range.
- (d) Invalid signal: This type of fault indicates serial data bus signal does not match specified execution condition.
- (e) Lost signal: This type of fault indicates specified no specified information is received.
- (f) Bus closed: This type of fault indicates bus is out of work.
- (g) Unstable signal: This type of fault indicates a transient distortion or interruption of a bus signal.

Waveform analysis

It is main method to determine the hardware fault of CAN bus system. Check operation of CAN-H and CAN-L in the form of a waveform and judge most CAN network hardware faults through oscilloscope.

For example, if bus waveform is abnormal, after sales staff can judge by "plug and unplug each joint and observe the waveform of oscilloscope at the same time". If bus waveform is normal after unplugging a joint, the fault is the module or the bus connected this module. This method is especially suitable for modules that do not have trouble code self-diagnosis.

41

Circuit diagram analysis

Use multimeter, oscilloscope, diagnostic tester and combine with circuit diagram to determine where is the fault.


Removal & Installation

Gateway Module (CGW)


Removal

Caution:

- Read configuration code of CGW module and record with a diagnostic tester before removing gateway module.
 - Try to prevent interior and body paint surface from being scratched when removing gateway module.
1. Turn ENGINE START STOP switch to OFF.
 2. Disconnect the negative battery cable.
 3. Remove the glove box assembly (See page 58-13).
 4. Disconnect the gateway module connector (arrow).

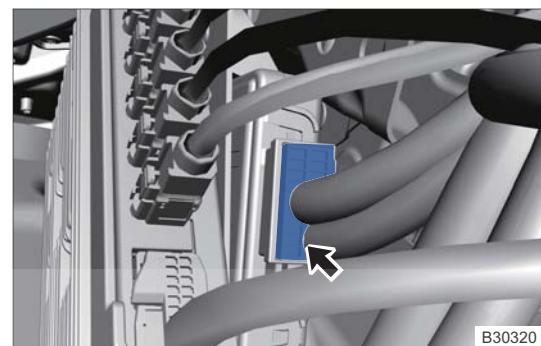

5. Remove 2 fixing nuts from gateway module secured on gateway bracket.

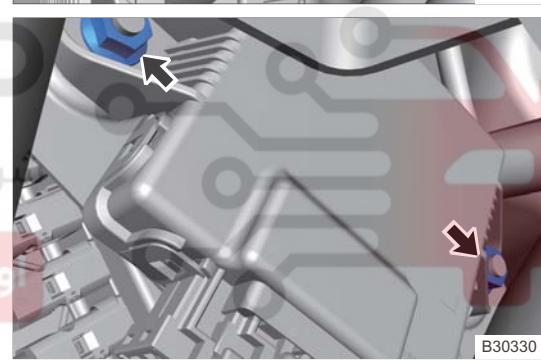

6. Remove the gateway module.

Installation

Hint:

Write configuration code with diagnostic tester to check whether the module is working normally after installation.

1. Fix gateway module to gateway bracket and tighten fixing nut.
2. Install gateway bracket, tighten bolt and connect connector.
3. Install the glove box assembly (See page 58-13).
4. Connect the negative battery cable.

دیجیتال خودرو

شرکت دیجیتال خودرو سامانه (مسئولیت محدود)

اولین سامانه دیجیتال تعمیرکاران خودرو در ایران

