


اولین سامانه دیجیتال تعمیرکاران خودرو در ایران

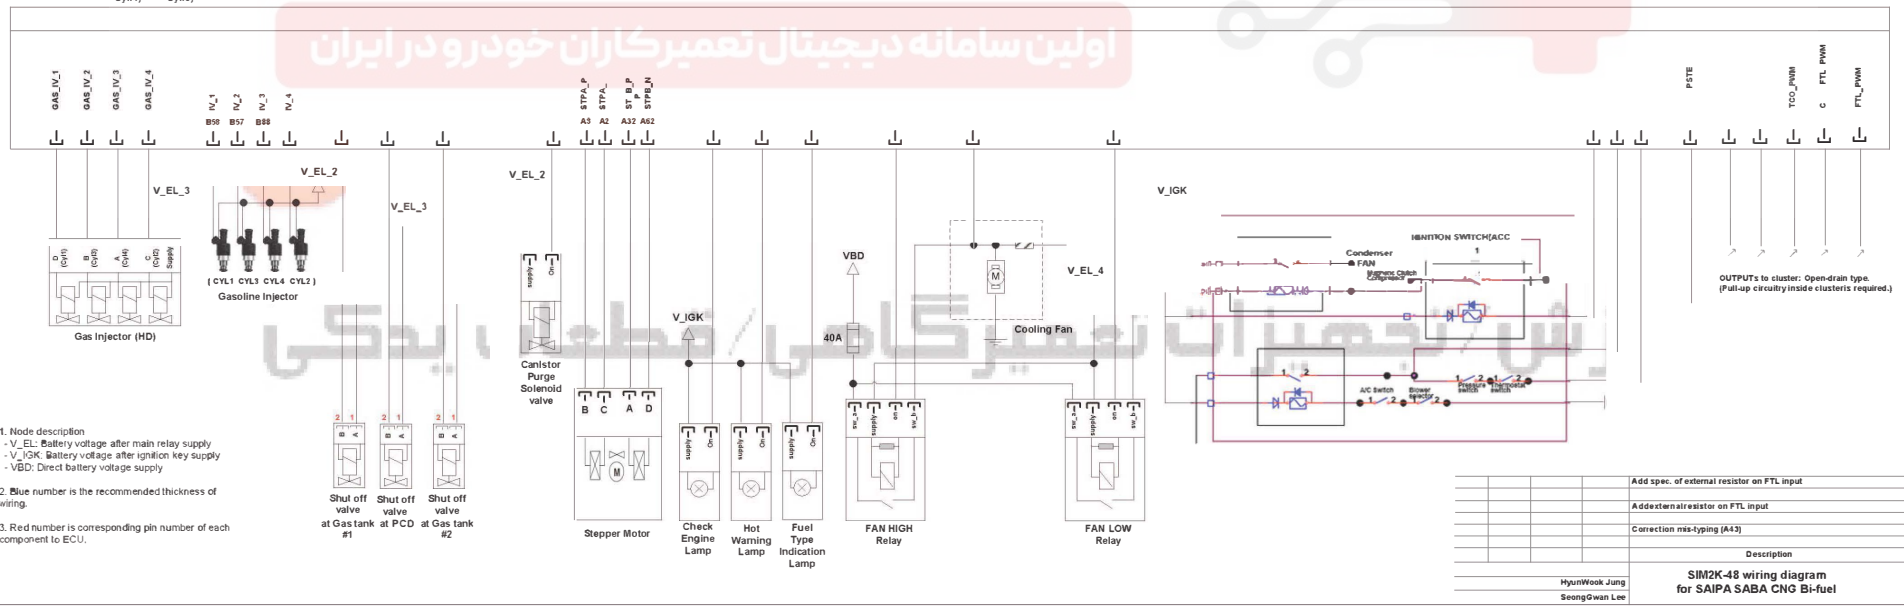

1. Node description  
 - V\_EL: Battery voltage after main relay supply  
 - V\_IJK: Battery voltage after ignition key supply  
 - VBD: Direct battery voltage supply
2. Blue number is the recommended thickness of wiring.
3. Red number is corresponding pin number of each component to ECU.

	Add spec. of external resistor on FTL input
	Add external resistor on FTL input
	Correction ms-typing (A43)
	Description
	SIM2K-48 wiring diagram for SAIPA SABA CNG Bi-fuel
HyunWook Jung SeongGwan Lee	